


Dehumidifier

DH 7220



FUNCTIONING PRINCIPLES

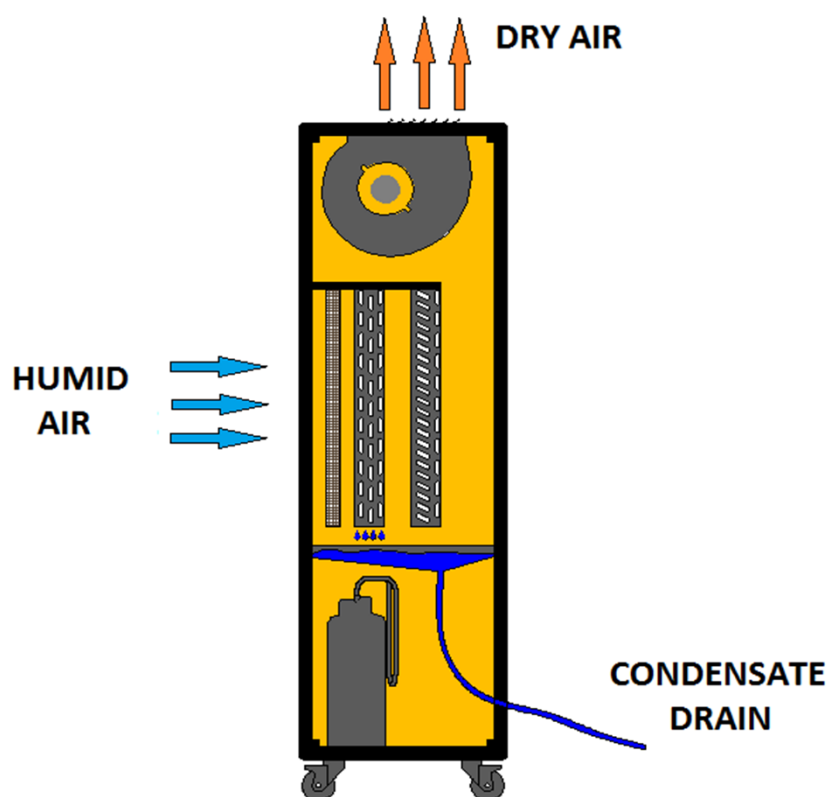

The dehumidifier controls humidity by forcing the excess of moisture to condense from the air into the unit as it passes over the cooling elements. Contact with this cold surface causes the moisture in the air to condense. This condensed water drains safely outside. The dried air then passes through a warmed coil where it is warmed and reenters the room at slightly higher temperature.

TECHNICAL DATA

Capacity (30°C/80%Rh)	l/24h	222,4	Refrigerant	R407C	
			Refrigerant mass	g	1730
Working range	°C / %Rh	5-32 / 30-90	Tank capacity	l	15
Net weight	kg	150	Power supply	V	3N 380-400
Gross weight	kg	170	Frequency	Hz	50
Noise level	dBa	72	Rated current	A	9,5
Air flow	m³/h	2150	Power consumption	W	4900

PACKING

Package dimensions	mm	835 x 615 x 1680
Device dimensions	mm	742 x 460 x 1604
Pieces per pallet	n°	1
Pallet dimensions	mm	835 x 615 x 1680

COMPONENTS

Compressor	rotary
Fan	centrifugal
Water tank	-
Defrosting system	hot-gas defrosting
Hygrostat	electronic
Others	-

ACCESSORIES

WIRING DIAGRAM

